

THE BEAST^S

Invented and designed to be the world's strongest industrial power tool

BANKO
INDUSTRIAL POWER TOOLS



GTS32
5,0 kW / 2,6 kg

THE BEAST S REDEFINES INDUSTRIAL POWER TOOLS WITH UNMATCHED PERFORMANCE. THE ONLY HANDHELD TURBINE STRAIGHT GRINDER ON THE MARKET.



The Beast S delivers unparalleled power and strength with durable construction, built to withstand the toughest working conditions, making it an indispensable tool for heavy-duty applications for professionals who demand the best.

Benefits

- ▶ The most efficient Oil-less grinding for an extreme material removal rate
- ▶ Much less insensitivity to variation of pressure
- ▶ Grinding with much less vibration
- ▶ Ergonomically shaped and balanced design


Features

- ▶ The most efficient 6 stage turbine motor featuring innovative turbine blades designed for maximum torque
- ▶ Precise stainless steel governor working under any pressure and condition
- ▶ Any length you need for cone wheels, straight wheels, rotary burrs and wheels with shaft

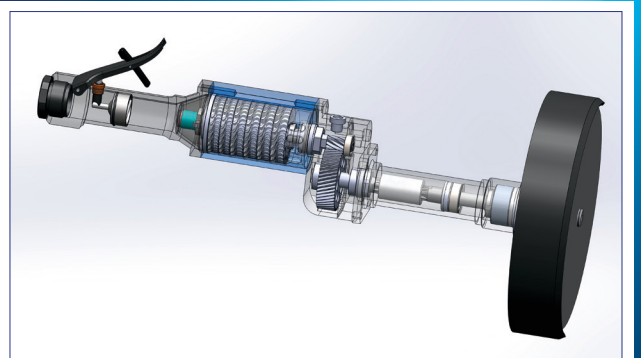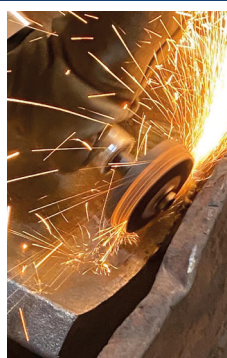


TURBINE STRAIGHT GRINDER
ABSOLUTELY OIL-FREE

BANKO
Patented technology

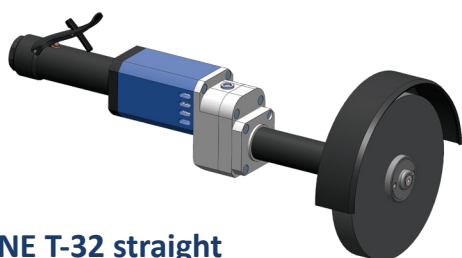

TURBINE T-32 straight

Order number	GTS32 S66 SW	GTS32 S85 SW	GTS32 S10 SW	GTS32 S12 SW	GTS32 S15 SW
Model	Banko T32 straight	Banko T32 straight	Banko T32 straight	Banko T32 straight	Banko T32 straight
Max. free speed (rpm)	6600	8500	10000	12000	15000
Spindle thread	UNC 5/8	UNC 5/8	UNC 5/8	UNC 5/8	UNC 5/8
Max dia straight wheel 80 m/s	200	180	150	125	100
Maximum Power (kW)	5.0	5.0	5.0	5.0	5.0
Max. weight (kg)	4.0	3.7	3.4	3.3	3.2
Lenght (mm)	490	490	490	490	490
Rec. hose dia. (mm)	16	16	16	16	16
Air inlet thread	1/2"	1/2"	1/2"	1/2"	1/2"
Optimal pressure (bar)	6.3	6.3	6.3	6.3	6.3
Air consumption max/free (l/sec)	52/19	52/19	52/19	52/19	52/19
Exhaust	Lateral	Lateral	Lateral	Lateral	Lateral
Noise (dB)	87	87	87	87	87
Vibration	3.5 m/s ²	3.5 m/s ²	3.5 m/s ²	3.5 m/s ²	3.5 m/s ²

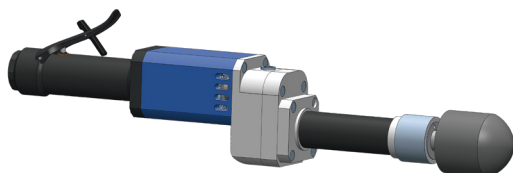

TURBINE T-32 straight

Order number	GTS32 S10 CW	GTS32 S12 CW	GTS32 S15 CW
Model	Banko T32 straight	Banko T32 straight	Banko T32 straight
Max. free speed (rpm)	10000	12000	15000
Spindle thread	M12x1	M12x1	M12x1
Max dia cone wheel 50 m/s	80	80	63
Maximum Power (kW)	5.0	5.0	5.0
Weight (kg)	2.7	2.7	2.6
Lenght (mm)	458	458	458
Rec. hose dia. (mm)	16	16	16
Air inlet thread	1/2"	1/2"	1/2"
Optimal pressure (bar)	6.3	6.3	6.3
Air consumption max/free (l/sec)	52/19	52/19	52/19
Exhaust	Lateral	Lateral	Lateral
Noise (dB)	87	87	87
Vibration	3.5 m/s ²	3.5 m/s ²	3.5 m/s ²

Grinder

Middle extension

Last extension

(140 mm)

(housing 140 mm)



GTS32 S66 E8-01

+



GTS32 S85 E9-01

+



GTS32 S10 E10-01

+



GTS32 S12 E10-01

+



GTS32 S15 E11-01

+



E1-02



E1-03-01 (Collet CE 6 mm)

E1-03-01 8 (Collet CE 8 mm)

E1-03-03 (Collet CES 6 mm)

E1-03-03 8 (Collet CES 8 mm)



E1-03-02 (CW M 12x1)



E1-03-06 (Angle collet CE 6 mm)

E1-03-06 8 (AngleCollet CE 8 mm)



CE



CES



Adapter CW - CE



Adapter CW



Adapter CW-SW

OPTION: TURBINE T32 straight left-right outlet

Straight grinder can be equipped with a manual switch that allows the air outlet to be directed left or right.

