



B-SAFETY[®]
PROFESSIONAL SAFETY SOLUTIONS



FOR YOUR SAFETY

PROFESSIONAL EMERGENCY SHOWER SYSTEMS

+ SAFE + POWERFUL + EFFICIENT



EVERY SECOND COUNTS IN AN EMERGENCY

HAND-HELD EYE SHOWERS

Two showers in one - this is possible thanks to the unique design of these showers: the hand-held eye showers can be operated as a fixed installed eye shower in the holder, or be removed from the holder to care for injured persons on the floor as a hand-held eye shower. **Choose from a variety of models with one or two spray heads.**

Technical Features:

- ✓ **B-SAFETY high-performance spray head** for a limited, uniform and soft water jet – optimized for rinsing chemicals out of eyes
- ✓ **Integrated automatic flow regulator** to achieve the correct jet height, regardless of the water pressure
- ✓ **Integrated check valve** to protect the drinking water network
- ✓ **Rubber sleeves** around the shower head protect the party seeking aid from impact injuries
- ✓ **Dust caps** open when the eye shower is actuated due to the water pressure
- ✓ **Large holes** in the shower heads prevent standing water and therefore limescale




BR 712 025
BR 713 025
BR 714 025

Item no.	Design	Shipping unit	
		Dimensions: L x W x H	Weight
BR 712 025	ClassicLine hand-held eye shower with one spray head, for wall/table mounting	380 x 290 x 100 mm	1.30 kg
BR 713 025	ClassicLine hand-held eye shower with one 45° spray head, for wall/table mounting	380 x 290 x 100 mm	1.34 kg
BR 714 025	ClassicLine hand-held eye shower with two 45° spray heads, for wall/table mounting	380 x 290 x 100 mm	1.44 kg

Technical data:

Water inlet: ½" female

Hose length: 1500 mm

Flow rate: 7 l/min per spray head

Standards / approvals:

EN 15154-2:2006, ANSI Z358.1-2014,

DVGW, NW-0417CL0263

FINDING YOUR WAY IN THE DARK

FIXED INSTALLED EYE SHOWERS

Fixed installed eye showers are the best solution for many applications in laboratories, warehouses and in industry. These showers are always easily visible from all sides. The large PUSH lever is photoluminescent so it is **easy to find in the dark or in poor visibility conditions.** Eye showers with bowls collect the used water and drain it away. The eye/face showers with a bowl and lid are used wherever there is a lot of dust and dirt.




Technical Features:

- ✓ **B-SAFETY high-performance spray head** for a limited, uniform and soft water jet – optimized for rinsing chemicals out of eyes
- ✓ **Integrated automatic flow regulator** to achieve the correct jet height, regardless of the water pressure
- ✓ **Photoluminescent PUSH lever** for good visibility, even in the dark
- ✓ **Rubber sleeves** around the shower head protect the party seeking aid from impact injuries
- ✓ **Dust caps** open when the eye shower is actuated due to the water pressure
- ✓ **Large holes** in the shower heads prevent standing water and therefore limescale


BR 300 085

BR 850 005

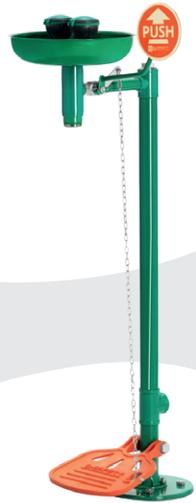BR 305 085

BR 305 085 - S1

Item no.	Design	Shipping unit	
		Dimensions: L x W x H	Weight
BR 300 085	ClassicLine safety eye shower with bowl, for wall mounting	400 x 300 x 215 mm	3.81 kg
BR 850 005	PremiumLine eye/face wash unit with bowl and lid, for wall mounting	375 x 290 x 370 mm	3.90 kg
BR 305 085	ClassicLine safety eye shower with bowl, floor mounted	800 x 200 x 120 mm 400 x 300 x 215 mm	5.30 kg 3.10 kg
BR 305 085 - S1	ClassicLine safety eye shower with bowl, floor mounted, including foot lever operation for the eye shower	800 x 200 x 120 mm 400 x 300 x 215 mm	5.30 kg 4.00 kg

Technical data:

Water inlet BR210085: 3/4" male
Water inlet BR300085: 3/4" female
Water inlet BR850005: 3/8" male
Flow rate: 14 l/min

Standards / approvals:
 EN 15154-2:2006, ANSI Z358.1-2014,
 DVGW, NW-0417CLO263

+ SAFE + POWERFUL + EFFICIENT



FLEXIBLY ADJUSTABLE



BODY EMERGENCY SHOWERS

The different body safety showers from B-SAFETY – also available as a special design – always offer you the right solution for your installation situation. Thanks to the selectable volume flows from 50 to 110 liters per minute, the showers can be adapted to the respective hazardous situation on site or the hazard class I to III as per **EN 15154**. The body emergency showers are self-draining, largely limescale-free and maintenance-free.

Technical Features:

- ✓ **B-SAFETY high-performance shower head** for a limited, uniform and soft water jet – optimized for rinsing chemicals off of the skin
- ✓ **Self-draining**, largely limescale-free and maintenance-free as well as very durable and corrosion-resistant
- ✓ **Perfect adjustment** of the body emergency shower to the respective hazardous situation on site thanks to the selectable volume flows from 50 to 110 liters per minute
- ✓ **Robust design** is also suitable for tough everyday industrial use
- ✓ **Special designs!** Variable B-SAFETY body emergency showers are adapted to the conditions on site
- ✓ **Chemical-resistant polyester powder coating** for use in aggressive environments

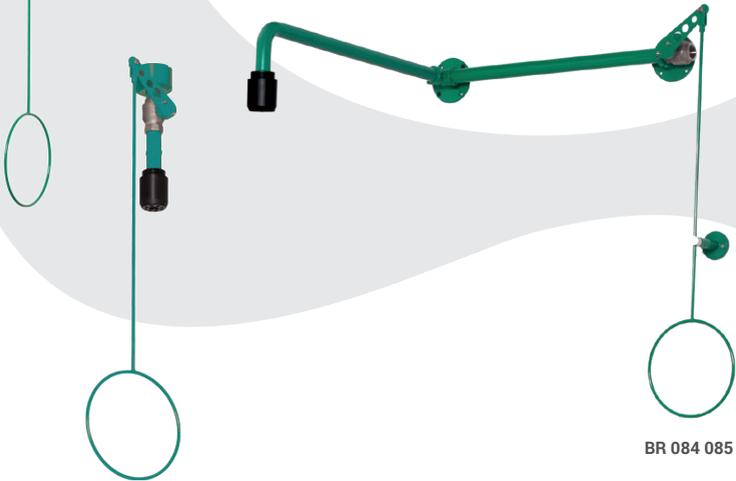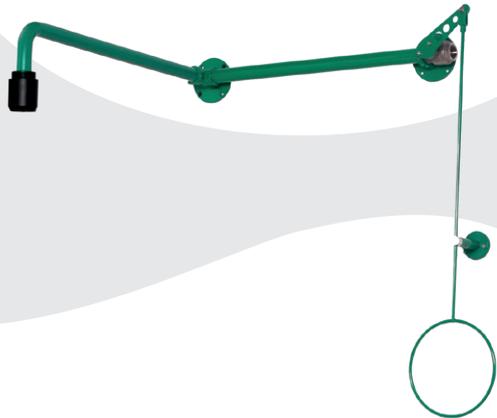


BR 081 085

BR 083 085

BR 084 085

Item no.	Design	Shipping unit Dimensions: L x W x H	Weight
BR 081 085 / 75L	ClassicLine body safety shower, for wall mounting	800 x 200 x 120 mm	2.50 kg
BR 083 085 / 75L	ClassicLine body safety shower, for ceiling mounting	800 x 200 x 120 mm	1.60 kg
BR 084 085 / 75L	ClassicLine body safety shower, for above-door mounting	800 x 200 x 120 mm	4.10 kg

Technical data:

Water inlet: 3/4" male/female
Flow rate: 75 l/min | 20 GPM

Standards / approvals:
 EN 15154-1:2006, EN 15154-5:2019, ANSI Z358.1-2014,
 DVGW, NW-0416CL0425



SIMPLY SPACE-SAVING


EMERGENCY SHOWER COMBINATIONS

The safety shower combinations – combinations of body emergency showers and eye showers – save more space compared to an individual installation. This makes it possible to create a central point of contact for first aid. Thanks to the possible combination with a hand-held eye shower or hand-held eye shower, an injured party can also partially care for minor injuries without having to use the body emergency shower.

Technical Features:

- ✓ **B-SAFETY high-performance shower head** for a limited, uniform and soft water jet – optimized for rinsing chemicals off of the skin
- ✓ **Robust design** is also suitable for tough everyday industrial use
- ✓ **Perfect adjustment** of the body emergency shower to the respective hazardous situation on site thanks to the selectable volume flows from 50 to 110 liters per minute
- ✓ **Self-draining**, largely limescale-free and maintenance-free as well as very durable and corrosion-resistant
- ✓ **Special designs!** Variable B-SAFETY body emergency showers are adapted to the conditions on site
- ✓ **Chemical-resistant polyester powder coating** for use in aggressive environments


BR 861 085

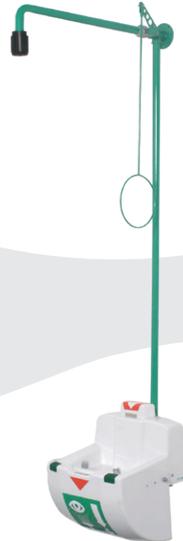BR 867 085

BR 868 085

Item no.	Design	Shipping unit	
		Dimensions: L x W x H	Weight
BR 861 085 / 75L	Safety shower combination, with eye shower, for wall mounting	800 x 200 x 120 mm	6.23 kg
BR 867 085 / 75L	Safety shower combination with eye shower with bowl, for wall mounting	800 x 200 x 120 mm 400 x 300 x 215 mm	6.23 kg 3.81 kg
BR 868 085 / 75L	Safety shower combination with eye-/ face wash unit, with bowl and lid, for wall mounting	800 x 200 x 120 mm 375 x 290 x 370 mm	6.23 kg 3.90 kg

Technical data:

Water inlet: 3/4" female
Body shower flow rate: 75 l/min | 20 GPM
Eye shower flow rate: 14 l/min

Standards / approvals:
 EN 15154-1:2006, EN 15154-2:2006,
 EN 15154-5:2019, ANSI Z358.1-2014,
 DVGW, NW-0416CLO425
 DVGW, NW-0417CLO263

+ SAFE + POWERFUL + EFFICIENT

OPTIMAL VISIBILITY

FREESTANDING EMERGENCY SHOWERS

The freestanding industrial safety showers are always used wherever a shower wall mounting is not possible or a central point of contact for first aid is to be created. It also makes sense to use them in large industrial halls and production facilities. The **good visibility of the shower from all sides** is a major advantage. The freestanding emergency showers can optionally be adapted to the local conditions with a large selection of options.

Technical Features:

- ✓ **B-SAFETY high-performance shower head** for a limited, uniform and soft water jet – optimized for rinsing chemicals off of the skin
- ✓ **Robust design** is also suitable for tough everyday industrial use
- ✓ **Perfect adjustment** of the body emergency shower to the respective hazardous situation on site thanks to the selectable volume flows from 50 to 110 liters per minute
- ✓ **Self-draining**, largely limescale-free and maintenance-free as well as very durable and corrosion-resistant
- ✓ **Special designs!** Variable B-SAFETY body emergency showers are adapted to the conditions on site
- ✓ **Chemical-resistant polyester powder coating** for use in aggressive environments

Technical data:

Water inlet: 1 ¼" female
Body shower flow rate: 75 l/min | 20 GPM
Eye shower flow rate: 14 l/min

Standards / approvals:
EN 15154-1:2006, EN 15154-2:2006,
EN 15154-5:2019, ANSI Z358.1-2014,
DVGW, NW-0416CL0425
DVGW, NW-0417CL0263




BR 832 085 / 75L
BR 837 085 / 75L
BR 837 085 - S2 / 75 L
BR 837 585 / 75L
BR 837 585 - S2 / 75 L

Item no.	Design	Shipping unit	
		Dimensions: L x W x H	Weight
BR 832 085 / 75L	ClassicLine body safety shower with eye shower, for floor mounting	810 x 310 x 310 mm	14.30 kg
BR 837 085 / 75L	ClassicLine body safety shower with eye shower, with bowl, for floor mounting	810 x 310 x 310 mm 400 x 300 x 215 mm	12.80 kg 3.81 kg
BR 837 085 - S2 / 75 L	ClassicLine body safety shower with eye shower, with bowl, for floor mounting, including foot lever operation for the eye shower, with information sign	810 x 310 x 310 mm 400 x 300 x 215 mm	13.70 kg 3.81 kg
BR 837 585 / 75L	ClassicLine body safety shower with eye shower with bowl, for floor mounting, drainage via standpipe	810 x 310 x 310 mm	14.80 kg
BR 837 585 - S2 / 75 L	ClassicLine body safety shower with eye shower, with bowl, for floor mounting, drainage via standpipe, including foot lever operation for the eye shower, with information sign	810 x 310 x 310 mm 400 x 300 x 215 mm	15.70 kg 3.81 kg

THREE BUSINESS AREAS – THREE STRENGTHS!

B-SAFETY is an internationally successful company that, through **professional know-how** and technological innovation, continues to develop **new innovative products** and solutions that are unique. Our own product development and also the creativity of our employees have made us a major supplier.

Safety showers

B-SAFETY eye showers and safety showers have been used successfully for years in laboratories and in industry as first-aid equipment to make work processes in companies safer. Many well-known companies as well as public institutions rely on solutions provided by **B-SAFETY** for their overall safety.

Emergency lights

B-SAFETY resp. B-LITE was one of the first suppliers on the German market to offer emergency lights with LED technology. Nowadays, LED technology is state of the art as a light source for emergency lights, emergency exit lights and escape sign lights. **B-LITE emergency lights** are also widely used in administration buildings, in industry and in public facilities.

Industrial safety

Industrial safety products from B-SAFETY are also becoming more and more common and contribute to safety in many companies. In our work safety range, we offer a combination of high-quality products from premium manufacturers as well as many products with the **B-SAFETY label**. For instance, you will find PPE products, products for first aid in the workplace, eye rinsing and a large skin protection range in our selection.

B-SAFETY GmbH

Oststraße 85 | 22844 Norderstedt
Germany

Phone +49-(0)40-53 80 92-70

Fax +49-(0)40-53 80 92-86

info@b-safety.com

www.b-safety.com



B-SAFETY
PROFESSIONAL SAFETY SOLUTIONS

b-d lite
PROFESSIONAL LIGHTING SOLUTIONS