

this is performance

FLEX


Making everything shine

Polishing and Automotive Products



So that it's all as good

as new

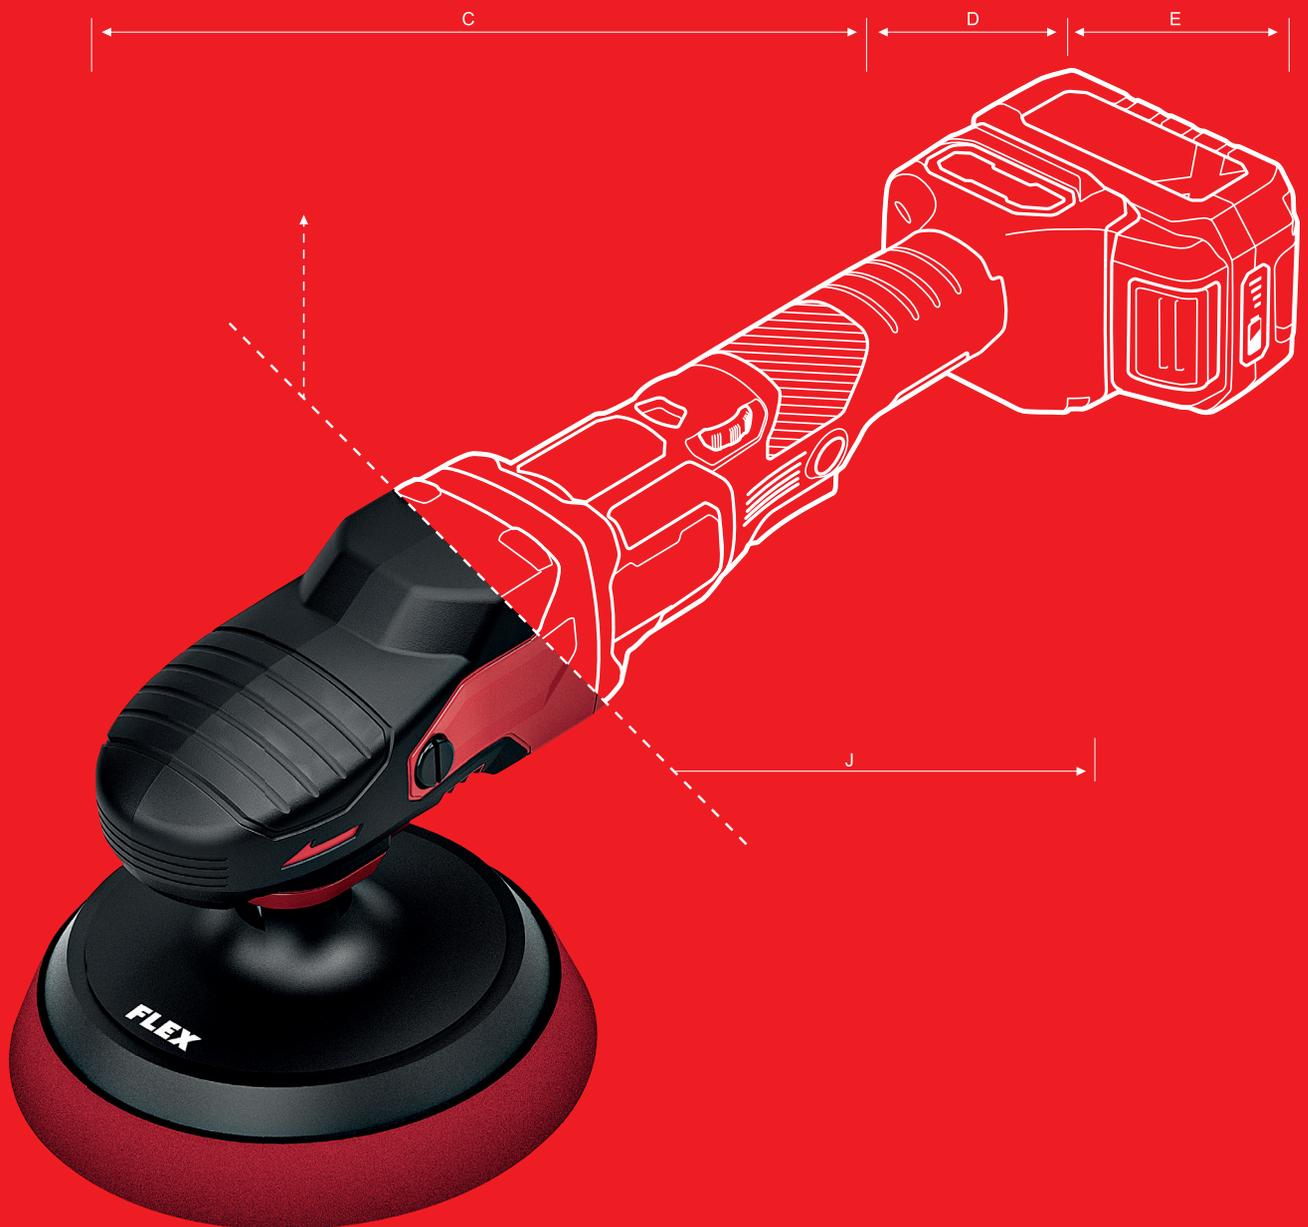

Three things are needed for the perfect surface finish: skill, the right feel, and FLEX, of course. Whether you are a professional working in a paint shop, an automotive all-rounder or a detailer - FLEX allows everyone to shine with the optimum system of polisher, pad and polish. The right combination is particularly important, because with the correct components to suit your experience, the material and the condition of the paintwork, you are certain to achieve brilliant results.

System with in-built safety

The right combination for perfect surfaces



Polisher

There are good reasons why FLEX polishers are the first choice of the professionals. FLEX has been defining the high technological standard for premium polishers for almost 90 years and thus has unique know-how which ensures our tools are noticeably better.



Pad

The optimum result is achieved only with the correct choice of polishing medium. The user must be familiar with the different effects produced by foams or fibre-based products such as fleece, wool and microfibre pads if they are to achieve the desired abrasive effect. The FLEX pads with colour-coded system provide clear guidance here.



Polish

The FLEX system is rounded off with perfectly coordinated abrasive, finishing and sealing polishes. They are the perfect match for our system

Achieve your goal with the correct drive




Experience and task determine the technology needed

FLEX provides the whole range of drive technologies for polishers and thus solutions for all types of user, be they a professional or a beginner with little experience. As a matter of principle: rotary polishers achieve a high removal rate and thus belong in experienced hands only because the workpiece usually requires subsequent finishing with a random orbital polisher.

Drive

Properties

Rotary

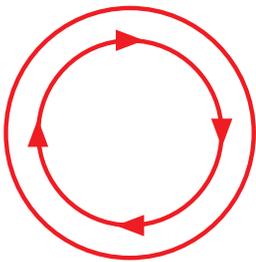

- Highest removal rate
- Rotary polishers require experience
- Quickest way to remove scratches
- Hologram formation possible

Abrasiveness



Speed ¹




Holograms ²



Hologram removal



Random orbital, with positive-action drive

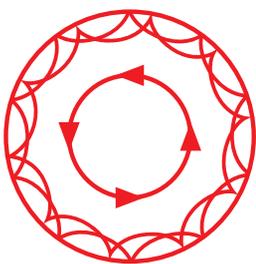

- Good removal performance
- No hologram formation
- Suitable for removing scratches and for finishing
- Wide range of applications

Abrasiveness



Speed ¹




Holograms ²



Hologram removal



Random orbital, free-running

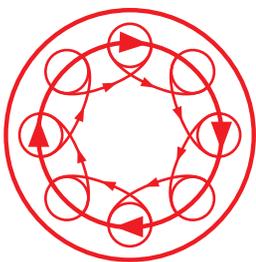

- Suitable for all types of user
- Easy to handle
- No hologram formation
- Poor removal performance
- Ideal for finishing

Abrasiveness



Speed ¹



Holograms ²




Hologram removal



1 Time required to remove damage
2) Risk of hologram formation

Rotary polisher


Great performance, great removal



PE 14-2 150

The high-end polisher for professional car restoration.

Perfect speed range plus high torque.

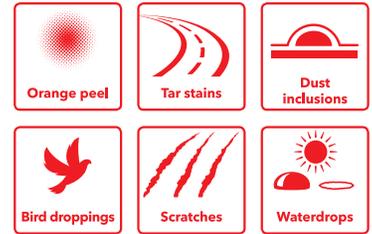

Technical features

- + Microprocessor electronics: continuously adjustable speed selection, tachometer-controlled constant speed, overload protection, restart protection and temperature monitoring
- + Powerful 1,400-watt motor with powerful fan for optimum cooling
- + Accelerator trigger switch for a slow and gentle start (starting speed at setting 1 (380 rpm)) and lock for continuous operation
- + Optimised airflow for the best possible cooling effect of the motor and gearbox. No exhaust air to annoy the user
- + Novel combination of planetary and angle gear reduces noise to a minimum
- + Flat gear head reduces the distance from the surface. This allows the tool to be operated correctly in any position
- + Handle cover: ergonomically shaped with Soft-Grip. The tool can be guided with precision and always provides a pleasant and safe grip
- + Spindle lock: is ideally positioned to avoid operating errors and not to influence the grip area
- + With rubber-coated storage surface for safe storage
- + 4-metre PUR H05-BQF cable: wear resistant, flexible with high abrasion and notch resistance

High-end basic polisher for:

- + Car restoration
- + Bodywork
- + Paint shop
- + Car repair shop
- + Smart repair
- + Aviation
- + Maritime
- + Furniture
- + Acrylic glass



PE 14-2 150

Standard equipment

- 1 handle

Order No.

373680

Technical data

| | |
|----------------------|--------------|
| Max. polishing pad Ø | 200 mm |
| Max. backing pad Ø | 150 mm |
| No-load speed | 380-2100 rpm |
| Power consumption | 1400 W |
| Tool fixture | M 14 |
| Weight | 2.3 kg |

PE 14-1 180

The specialist for large areas and heat-sensitive materials or when large polishing pads are required.

Technical features

As PE 14-2 150

- + Accelerator trigger switch for a slow and gentle start (starting speed at setting 1 (250 rpm)) and lock for continuous operation
- + Specially designed for polishing large horizontal and vertical surfaces. For automotive, maritime, aviation applications
- + Polishes with extremely low speed and high torque, e. g. for heat-sensitive surfaces


High-end polisher for:

- + Maritime
- + Aviation
- + Car restoration
- + Furniture
- + Acrylic glass



Technical data

| | |
|----------------------|--------------|
| Max. polishing pad Ø | 250 mm |
| Max. backing pad Ø | 180 mm |
| No-load speed | 250-1380 rpm |
| Power consumption | 1400 W |
| Tool fixture | M 14 |
| Weight | 2.3 kg |

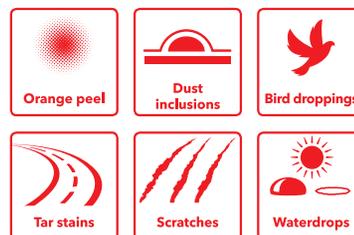

PE 14-1 180

Standard equipment

- 1 handle

Order No.

395749

PE 8-4 80

The handy polisher for small areas. Ideal as an ancillary tool.

Technical features

- + VR Electronics: with tachometer-controlled constant speed, soft start, overload protection and speed preselection
- + Lightweight and handy for use on smaller areas, difficult to reach places
- + Spindle lock


Ancillary polisher for

- + Car restoration
- + Bodywork
- + Smart repair



Technical data

| | |
|----------------------|---------------|
| Max. polishing pad Ø | 80 mm |
| Max. backing pad Ø | 75 mm |
| No-load speed | 1300-3900 rpm |
| Power consumption | 800 W |
| Tool fixture | M 14 |
| Weight | 1.8 kg |

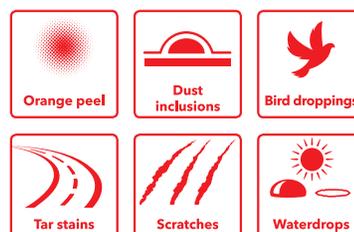

PE 8-4 80

Standard equipment

- 1 side handle

Order No.

405817

PE 14-3 125

The all-rounder for small to medium-sized polishing discs.

Technical features

- + VR microprocessor electronics: with tachometer-controlled constant speed, soft start, accelerator trigger switch, restart protection after power failure, overload protection, temperature monitoring and speed preselection
- + Accelerator trigger switch for a slow and sensitive start
- + Thanks to the wide speed range, ideally suited to work perfectly with polishing pads from Ø 80 to max. Ø 160 mm
- + Recommended polishing pad Ø 140 mm
- + Ergonomic design
- + Slim handle and ergonomically shaped handle cover for optimum handling and fatigue-free polishing
- + 4-metre PUR H05-BQF cable: wear resistant, flexible with high abrasion and notch resistance
- + Spindle lock

Ancillary polisher for

- + Workshops
- + Bodywork
- + Paint shop
- + Smart repair



Technical data

| | |
|----------------------|---------------|
| Max. polishing pad Ø | 160 mm |
| Max. backing pad Ø | 125 mm |
| No-load speed | 1100-3700 rpm |
| Power consumption | 1400 W |
| Tool fixture | M 14 |
| Weight | 2.2 kg |

PE 14-3 125

Standard equipment

- 1 side handle

Order No.

406813

Free-running random orbital polisher

Always in good hands



XFE 7-15 150

Ideal for beginners or when working on 2-stage processes. As a supplementary tool to the rotary polisher, it provides fast hologram removal and a perfect finish.



Technical features

- + VR microprocessor electronics: with tachometer-controlled constant speed, soft start, accelerator trigger switch, restart protection after power failure, overload protection, temperature monitoring and speed preselection
- + Free-running drive for hologram-free finishing
- + 15 mm polishing stroke for high efficiency
- + Accelerator trigger switch for a slow and sensitive start and locking for continuous running
- + Cushioned special hook and loop backing pad for polishing
- + Very smooth running thanks to balancing mass
- + Optimised airflow for the best possible cooling effect of the motor and gearbox.
- + Flat gear head reduces the distance from the surface. This allows the tool to be operated correctly in any position
- + Handle cover: ergonomically shaped with Soft-Grip.
- + Low heat generation on the surface makes it ideal for temperature-sensitive paints

Random orbital polisher

for:

- + Car restoration
- + Car dealers
- + Paint shop
- + Car repair shop
- + Smart repair
- + Maritime



XFE 7-15 150

Standard equipment

- 1 special hook and loop backing pad, Ø 125
- 1 special hook and loop backing pad, Ø 150

Order No.

418080

Technical data

| | |
|------------------------|---------------|
| Max. polishing pad Ø | 160 mm |
| Max. backing pad Ø | 150 mm |
| No-load speed | 1500-4500 rpm |
| Stroke rate at no-load | 3000-9000 rpm |
| Stroke | 15 mm |
| Power consumption | 710 W |
| Weight | 2.4 kg |

Note: If the original FLEX accessories are not used with the XFE/XCE models, this can lead to increased vibrations, a poorer end result or increased wear, or even cause equipment damage!

XFE 7-12 80

The small, compact tool is the ideal complement to larger polishers. Perfect for spot repairs. It can be used for a large number of applications when working with difficult shapes.



Technical features

- + VR Electronics: with tachometer-controlled constant speed, soft start, overload protection, temperature monitoring and speed preselection
- + Free-running drive for hologram-free finishing
- + Handle cover: ergonomically shaped with Soft-Grip. The tool can be guided with precision and always provides a pleasant and safe grip
- + 12 mm polishing stroke for high efficiency
- + Lightweight and handy for use on smaller areas, difficult to reach places
- + Low heat generation on the surface makes it ideal for temperature-sensitive paints
- + Perfect for spot repairs and difficult shapes. Ideal complement to larger polishers

Supplementary polisher for:

- + Car restoration
- + Car repair shop
- + Smart repair
- + Maritime
- + Acrylic glass



XFE 7-12 80

Standard equipment

- 1 special hook and loop backing pad Ø 75

Order No.

447129

Technical data

| | |
|------------------------|----------------|
| Max. polishing pad Ø | 80 mm |
| Max. backing pad Ø | 75 mm |
| No-load speed | 1800-5500 rpm |
| Stroke rate at no-load | 3600-10800 rpm |
| Stroke | 12 mm |
| Power consumption | 700 W |
| Weight | 2.1 kg |

Note: If the original FLEX accessories are not used with the XFE/XCE models, this can lead to increased vibrations, a poorer end result or increased wear, or even cause equipment damage!



Random orbital polisher with positive-action drive

Full control during every revolution



XCE 10-8 125

Rotary and random orbital motions combined in one polisher. For effective and efficient surface finishing.

Technical features

- + VR microprocessor electronics: with tachometer-controlled constant speed, soft start, accelerator trigger switch, restart protection after power failure, overload protection, temperature monitoring and speed preselection
- + 8 mm polishing stroke, positive-action drive provides high abrasive power without creating any holograms
- + Cushioned special hook and loop backing pad for polishing
- + Very smooth running thanks to balancing mass
- + Basic unit for hologram-free working on the most common surface problems through to finishing
- + Flat gear head reduces the distance from the surface. This allows the tool to be operated correctly in any position
- + Handle cover: ergonomically shaped with Soft-Grip. The tool can be guided with precision and always provides a pleasant and safe grip
- + Optimised airflow for the best possible cooling effect of the motor and gearbox. No exhaust air to annoy the user
- + Low heat generation on the surface makes it ideal for temperature-sensitive paints

Random orbital polisher for:

- + Car restoration
- + Car dealers
- + Paint shop
- + Car repair shop
- + Smart repair
- + Maritime



XCE 10-8 125

Standard equipment

- 1 special hook & loop backing pad, 125 Ø

Order No.


418072

Technical data

| | |
|------------------------|---------------|
| Max. polishing pad Ø | 160 mm |
| Max. backing pad Ø | 150 mm |
| No-load speed | 140-430 rpm |
| Stroke rate at no-load | 2900-8600 rpm |
| Stroke | 8 mm |
| Power consumption | 1010 W |
| Weight | 2.6 kg |

Enjoy the freedom

FLEX is and will remain the benchmark for professional quality in the field of polishing - even with 18 V battery power. High end surface finishing then becomes as independent and flexible as never before. A matter of course: There are no compromises in terms of performance and security in the system. True performance.

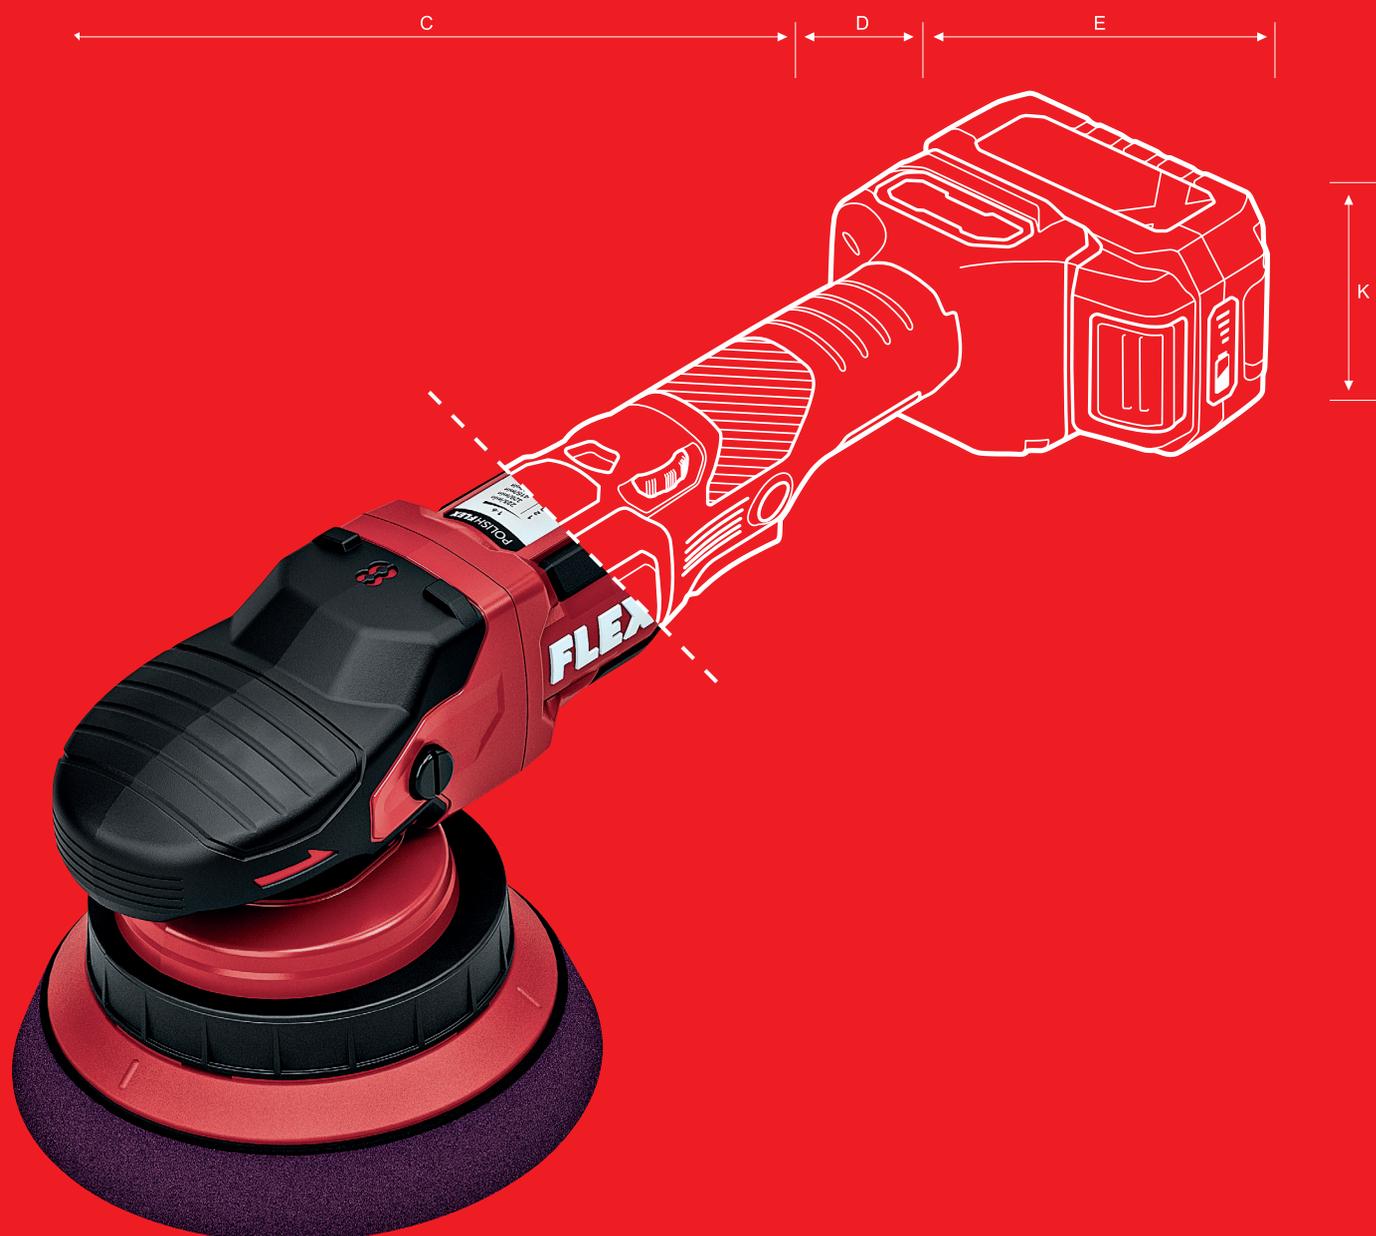

Cordless polisher - The full range

- Random orbital or rotational drive technology
- For all users from professional polishers to beginners
- For all painted surfaces in automotive, caravanning, aviation, and maritime applications
- Two exchangeable batteries for work without breaks
- For perfect results


Perfect balance

Maximum freedom of movement and ergonomics for the user. The optimum location of the battery not only perfects the spread of weight, but also promotes the polisher's high-response manoeuvrability without disruptive elements and any possible contact with the painted workpiece. Never before has the polisher been so responsive!



Cordless rotary polisher

Polishing with Proformance



PE 150 18-EC

Concentrated power with high speed for high removal rate

Technical features

- + As powerful as a cable polisher over the entire battery life
- + CDC constant electronics prevent speed fluctuations
- + Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- + Simple speed adjustment via speed selection wheel with detent points accessible from both sides
- + Ideal speed range for automotive, maritime and aviation applications
- + Perfectly suited for removing deep scratches and for reconditioning heavily-weathered paintwork
- + Maximum removal rate in the FLEX 2-step system, with the red sponge and red polish
- + New generation of brushless motors delivering high efficiency and performance
- + Newly-developed high-performance gearbox for maximum noise and vibration reduction

Cordless rotary polisher for:

- + Vehicle cleaners
- + Car repair shops
- + Smart repairs
- + Aviation
- + Maritime
- + Acrylic glass industry



PE 150 18-EC C

Supplied in a box

- 1 hook and loop backing pad, Ø 150 mm

Order No.

532508

PE 150 18-EC Set

Supplied in a box

Standard equipment

- 1 hook and loop backing pad, Ø 150 mm
- 2 rechargeable batteries 5.0 Ah AP 18.0/5.0
- 1 charger CA 12/18

Order No.

533019

Technical data

| | |
|--------------------------------|--------------------|
| Max. backing pad Ø | 150 mm |
| Tool holder | M14 |
| No-load speed | 550-1800 rpm |
| Battery voltage | 18 V |
| Battery capacity | 2.5 / 5.0 / 8.0 Ah |
| Average battery runtime 2.5 Ah | up to 12 min |
| Average battery runtime 5.0 Ah | up to 24 min |
| Weight excluding battery | 2.1 kg |

Matching accessories:

Hook-and-loop pad, cushioned M 14

BP-M D150 M14

Order no.

350745

BP-M D125 M14

Order no.

350737

BP-M D75 M14

Order no.

420492

Free-running cordless eccentric polisher

Carefully forwards



XFE 15 150 18-EC

Random orbital polishers remove material gently for reliable results.
That makes them ideal for beginners.



Technical features

- + As powerful as a cable polisher over the entire battery life
- + CDC constant electronics prevent speed fluctuations
- + Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- + Simple speed adjustment via speed selection wheel with detent points accessible from both sides
- + Ideal speed range for automotive, maritime and aviation applications
- + Perfect for eliminating holograms and removing light scratches
- + Maximum deep sheen in the FLEX 2-step system, with the black sponge and black polish
- + New generation of brushless motors delivering high efficiency and performance
- + Newly-developed high-performance gearbox for maximum noise and vibration reduction

Cordless eccentric polisher for:

- + Vehicle cleaners
- + Car repair shops
- + Smart repairs
- + Aviation
- + Car dealers
- + Maritime
- + Acrylic glass industry



XFE 15 150 18.0-EC C

Supplied in a box

Standard equipment

- 1 Special hook and loop backing pad Ø 150 mm

Order No.

532647

XFE 15 150 18.0-EC Set

Supplied in a box

Standard equipment

- 1 special hook and loop backing pad Ø 150 mm
- 2 rechargeable batteries 5.0 Ah AP 18.0/5.0
- 1 charger CA 12/18

Order No.

533021

Technical data

| | |
|--------------------------------|--------------------|
| Max. backing pad Ø | 150 mm |
| Stroke | 15 mm |
| No-load speed | 1350-4350 rpm |
| Stroke rate at no-load | 2700-8700 rpm |
| Battery voltage | 18 V |
| Battery capacity | 2.5 / 5.0 / 8.0 Ah |
| Average battery runtime 2.5 Ah | up to 20 min |
| Average battery runtime 5.0 Ah | up to 40 min |
| Weight excluding battery | 2.1 kg |

Matching accessories:

Hook-and-loop pad, cushioned

BP-M/R D150 XCE/XFE

Order no.

487988

BP-M/R D125 XCE/XFE

Order no.

487953

Cordless random orbital polisher with positive-action drive

Maximum freedom of movement



XCE 8 150 18-EC

For hologram-free removal of various types of paint damage.
The ideal complement for anyone who needs a portable random orbital polisher.



Technical features

- + As powerful as a cable polisher over the entire battery life
- + CDC constant electronics prevent speed fluctuations
- + Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- + Simple speed adjustment via speed selection wheel with detent points accessible from both sides
- + Ideal speed range for automotive, maritime and aviation applications
- + Perfect for removing medium scratches and for eliminating signs of wear and holograms
- + Maximum efficiency in one step with the FLEX 1-step system, with the violet sponge and violet polish
- + New generation of brushless motors delivering high efficiency and performance
- + Newly-developed high-performance gearbox for maximum noise and vibration reduction

Cordless rotary polisher for:

- + Vehicle cleaners
- + Car repair shops
- + Smart repairs
- + Aviation
- + Car dealers
- + Maritime
- + Acrylic glass industry



XCE 8 150 18-EC C

Supplied in a box

Standard equipment

- 1 special hook and loop backing pad, Ø 150 mm

Order No.

XCE 8 150 18-EC Set

Supplied in a box

Standard equipment

- 1 special hook and loop backing pad, Ø 150 mm
- 2 rechargeable batteries 5.0 Ah AP 18.0/5.0
- 1 charger CA 12/18

Order No.

533020

Technical data

| | |
|--------------------------------|--------------------|
| Max. backing pad Ø | 150 mm |
| Stroke | 8 mm |
| No-load speed | 225-700 rpm |
| Stroke rate at no-load | 2700-8700 rpm |
| Battery voltage | 18 V |
| Battery capacity | 2.5 / 5.0 / 8.0 Ah |
| Average battery runtime 2.5 Ah | up to 20 min |
| Average battery runtime 5.0 Ah | up to 40 min |
| Weight excluding battery | 2.0 kg |

Matching accessories:

Hook-and-loop pad, cushioned

BP-M/R D150 XCE/XFE

Order no.

487988

BP-M/R D125 XCE/XFE

Order no.

487953

Cordless random orbital / rotary polishers

Master of the quick change



10 sec.

Can be converted in just
10 seconds - no tools,
no stress.

PXE 80 12-EC

The all-rounders for spot repairs and vehicle preparation is up to any task, from blossom sanding to hologram-free finishing.

Technical features

- + For rotary and random orbital free-running work with 3 and 12 mm stroke
- + Innovative, tool-free quick-change system for the exchange of drive types rotary and random orbital
- + Flexible and easy as never before from spot sanding to finishing without creating any holograms with one tool
- + The ideal complement device for every vehicle finisher, varnisher and the spot repair area
- + Perfect ergonomics and flexible grip options because of its ideally placed softgrip surfaces
- + Brushless motor with greater efficiency and a longer service life
- + Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- + Features constant speed control and four speed stages, display by LED clearly visible

Cordless eccentric polisher for:

- + Vehicle cleaners
- + Smart repairs
- + Paint shop
- + Car body shops
- + Car repair shops



PXE 80 12-EC C

Supplied in a box

Order No.
532267

PXE 80 12-EC/2.5 Set

Standard equipment

- 1 adapter, rotary DT-P
- 1 random-orbital adapter, 3 mm stroke DT-XF3
- 1 random-orbital adapter, 12 mm stroke DT-XF12
- 1 adhesive pad 30 Ø BP-M/SR D30 PXE
- 1 hook & loop backing pad 30 Ø BP-M D30 PXE
- 1 hook & loop backing pad 75 Ø BP-M D75 PXE
- 2 rechargeable batteries 2.5 Ah AP 12/2.5
- 1 charger CA 12/18
- 1 carrying case L-BOXX® 136
- 1 case insert



Order No.
532268

Technical data

| | |
|--------------------------|---------------------------------|
| Max. backing pad Ø | 75 mm |
| Stroke | 3 + 12 mm |
| No-load speed | 400-2000/-3000/-4000/-5800 rpm |
| Stroke rate at no-load | 800-4000/-6000/-8000/-11600 rpm |
| Battery voltage | 12 V |
| Battery capacity | 2.5 / 5.0 Ah |
| Weight excluding battery | 0.6 kg |



Up to any task



Polishing with the PXE 80 12-EC

- ☞ Ø 30, 50, 75 mm hook and loop pad
- ☞ rotary or random orbit
- ☞ 12 mm stroke

Flexible polishing with polishing pads < 75 mm. The Ø 30 mm hook and loop pad can be combined with any drive type and stroke size. From rotary elimination of abrasion marks to hologram-free finishing, everything is possible.



Grinding with the PXE 80 12-EC

- ☞ Ø 30, 50, 75 mm hook and loop pad
- ☞ random orbital
- ☞ 3 mm stroke
- ☞ Adapter 6 mm stroke*

The Ø 75 mm hook and loop pad can be combined with the random orbit drive with a 3 mm, 6 mm & 12 mm stroke. The 12 mm stroke is best suited to defect correction, hologram removal and finishing. The 3 mm stroke is best suited to initial sanding and damage correction



Order a separate Ø 75 mm backing pad (492361) at the same time for sanding work.

| | Polishing | Sanding | Sanding + Polishing | Polishing |
|--|---|--|---|---|
| |  |  3 mm |  6 mm |  12 mm |
| |  |  |  |  |
| Ø 30 mm  | X | X | X | — |
| Ø 50 mm  | — | X | X | X |
| Ø 75 mm  | — | X | X | X |

* Now available as accessory (Order no. 531009)

Matching accessories:

Flexible shaft FS 140

New, clever and quickly ready for use without tools. Working on spots in tricky places has never been so easy. The 140 cm shaft makes using it flexible and ideal in hard-to-reach areas.



Technical features

- ⊕ Toolless mounting on PXE. The innovative quick-change mechanism of the PXE allows the shaft to be mounted quickly and easily
- ⊕ Toolless quick change of accessories thanks to bit holder. This allows the polishing discs to be changed quickly and easily.
- ⊕ The form fit of the hexagonal mount prevents the polishing bodies from slipping through. This guarantees even and perfect polishing results every time.
- ⊕ The 140 cm shaft can be guided comfortably and conveniently without the polisher tipping or having to be held in the hand all the time.
- ⊕ High-quality materials guarantee an extremely long service life.

Applications

- ⊕ Paint preparation & scratch removal
- ⊕ Door handle recesses and radiator grille
- ⊕ Exterior mirror casing
- ⊕ Vehicle emblems, logos & lettering
- ⊕ Rims
- ⊕ Spot repair
- ⊕ Interior (piano lacquer, fittings etc.)

FS 140 Set

Standard equipment

- 12 polishing cones (4 each in soft, medium and hard)
- 12 polishing cylinders (4 each in soft, medium and hard)
- 1 deep-drawn insert
- 1 L-Boxx (TK-L 102)

| Designation | Order No. |
|-------------|-----------|
| FS 140 Set | 516112 |

FS 140 C Set

Standard equipment

- 6 polishing cones (2 each in soft, medium and hard)
- 6 polishing cylinders (2 each in soft, medium and hard)

| Designation | Order no. |
|--------------|-----------|
| FS 140 C Set | 533183 |

Adapter eccentrically free-running, 3 mm stroke

- 3 mm Orbit

| Designation | Order no. |
|-------------|-----------|
| DT-XF 3 | 492418 |

- 6 mm orbit

| Designation | Order no. |
|-------------|-----------|
| DT-XF 6 | 531009 |

- 12 mm orbit

| Designation | Order no. |
|-------------|-----------|
| DT-XF 12 | 492426 |

Hook-and-loop pad, cushioned

- Ø 30 mm

| Designation | Order no. |
|--------------|-----------|
| BP-M D30 PXE | 492353 |

- Ø 50 mm

| Designation | Order no. |
|--------------|-----------|
| BP-M D50 PXE | 509248 |

- Ø 75 mm

| Designation | Order no. |
|--------------|-----------|
| BP-M D75 PXE | 492361 |

PP-Mix 35 HEX VE30

Standard equipment

- 15 polishing cones (2 each in soft, medium and hard)
- 15 polishing cylinders (2 each in soft, medium and hard)

| Designation | Order no. |
|-----------------------|-----------|
| PP-Mix 35 HEX VE30 | 533182 |

Special adhesive pad, cushioned

- soft, with 5 mm foam rubber, Ø 30 mm

| Designation | Order no. |
|-------------|-----------|
| BP-M/SR D30 | 492388 |

Rotary adapter

- Ø 30 mm

| Designation | Order no. |
|-------------|-----------|
| DT-P | 492396 |



Innovative quick change
Toolless mounting on PHE



Toolless accessory change

- Bit holder mechanism
- The accessory does not slip in the bit holder
- Form fit for constant work progress
- Rubberised bit holder for maximum surface protection



Longest service life
Highest quality materials for a long service life. Perfect flexibility of the corrugated sheath

Maximum FLEXibility
140 cm length for the ultimate freedom when polishing

Maximum convenience

- Perfect ergonomics thanks to extremely slim handle area
- Secure grip while working
- Ideal handle position for guiding when doing the finest work



Green (hard)
for deeper scratches



Purple (medium)
all-rounder



Orange (soft) for finishing & high sheen



Green (hard)
for deeper scratches



Purple (medium)
all-rounder



Orange (soft) for finish & high sheen

Polishing cylinders

- e.g. for mouldings, spot repairs etc.

| Product variants | Order No. |
|------------------------|-----------|
| Green PZ-G 35 HEX VE5 | 517755 |
| Purple PZ-V 35 HEX VE5 | 517763 |
| Orange PZ-O 35 HEX VE5 | 517771 |

Polishing cones

- e.g. for door handle recesses, radiator grille, rims, interior etc.

| Product variants | Order No. |
|------------------------|-----------|
| Green PK-G 35 HEX VE5 | 517798 |
| Purple PK-V 35 HEX VE5 | 517801 |
| Orange PK-O 35 HEX VE5 | 517828 |

NEW!

XLITHIUM POWER PLUS

The new FLEX 18 V battery pack with 8.0 Ah. Additional power and longer runtimes for more performance.

+ Performance

The higher energy density of the new battery enables up to 75% more power.

THERMA-TECH™
**X LITHIUM
POWER PLUS**

+ Runtime

Due to the modern cell technology up to 60% longer runtime is achieved.*

* Compared to AP 18.0/5.0 Ah

+ Life cycle

Therma-Tech™ technology absorbs the heat generated for longer battery runtimes and life cycles. Keep Control manages strong power output while protecting the battery pack.



AP 12 V



| | | |
|-----------|--------|--------|
| Order no. | 532290 | 531690 |
| AP 12 V | 2.5 Ah | 5.0 Ah |

Charger CA 12

- For 12 V battery packs
- Integrated battery pack cooling, overheating, discharge and overload protection
- With LED charge status display



| | |
|--------------------------------|--------|
| Order no. | 532286 |
| Charging times 12 V batteries | |
| 40 min for 2.5 Ah battery pack | |
| 50 min for 5.0 Ah battery pack | |

P-Set 12-22 Q

- 1x quick charger CA 12
- 2x 12 V battery pack AP 12/2.5



| | |
|-----------|--------|
| Order no. | 531719 |
|-----------|--------|

Double charger CA SP 2x 12/18

- For 12 V und 18 V battery packs



| | |
|--------------------------------|--------|
| Order no. | 533152 |
| Charging times 18 V batteries | |
| 40 min for 2.5 Ah battery pack | |
| 60 min for 5.0 Ah battery pack | |
| 95 min for 8.0 Ah battery pack | |

The patented Proformance battery system delivers what it promises!



Long running time, long service life, long maximum performance. Only FLEX can do that: With the patented cooling system, FLEX achieves optimum protection of the tool and the battery cells. The battery management system controls the permanent data exchange between tool, battery and charger so that all parameters are optimally set. This ensures power in the cooperation between battery and tool and enables use without energy loss.



Keep Control

The smart technology controls and monitors the tool activity and charging process and informs about the charging status via LCD display.



Therma-Tech™

Integrated cooling - The innovative thermal management allows you to work at full power for much longer.



Power Battery

High-performance battery cells - The FLEX high-performance cells use the full battery capacity and thus allow longer battery runtimes!



Lithium-Ion

No self-discharge. No memory effect.



EC-Motor

Low-wear and brushless motor with EC technology for more mileage, more power and more life.



Battery tool



Therma-Tech™ technology



Charger



AP 18 V

Therma-Tech™ X LITHIUM POWER PLUS



Order no. 532732 532733 532748

AP 18 V 2.5 Ah 5.0 Ah 8.0 Ah

P-Set 22 Q

- 1x charger CA 18
- 2x 18 V battery pack AP 18/2.5



Order no. X LITHIUM POWER 532740

P-Set 55 R

- 1x quick charger CA 12/18
- 2x 18 V battery pack AP 18/5.0



Order no. X LITHIUM POWER 532739

Charger CA 12 / 18

- For 12 V and 18 V battery packs
- Integrated battery pack cooling, overheating, discharge and overload protection
- With LED charge status display

Charging times 18 V batteries

- 40 min for 2.5 Ah battery pack
- 50 min for 5.0 Ah battery pack
- 70 min for 8.0 Ah battery pack



Order no. 532880



The large-format LCD display with charging time and charging status indicator shows the remaining charging time.

P-Set 18-88 R


- 1x quick charger CA 12/18
- 2x 18 V battery pack AP 18/8.0



Order no. X LITHIUM POWER PLUS 533175

System with in-built safety

Polish and pad play a crucial role in the polishing process. FLEX therefore provides a perfectly coordinated system with an optimum range of sponges for every application: simply use the correct colour to successfully achieve your goal.

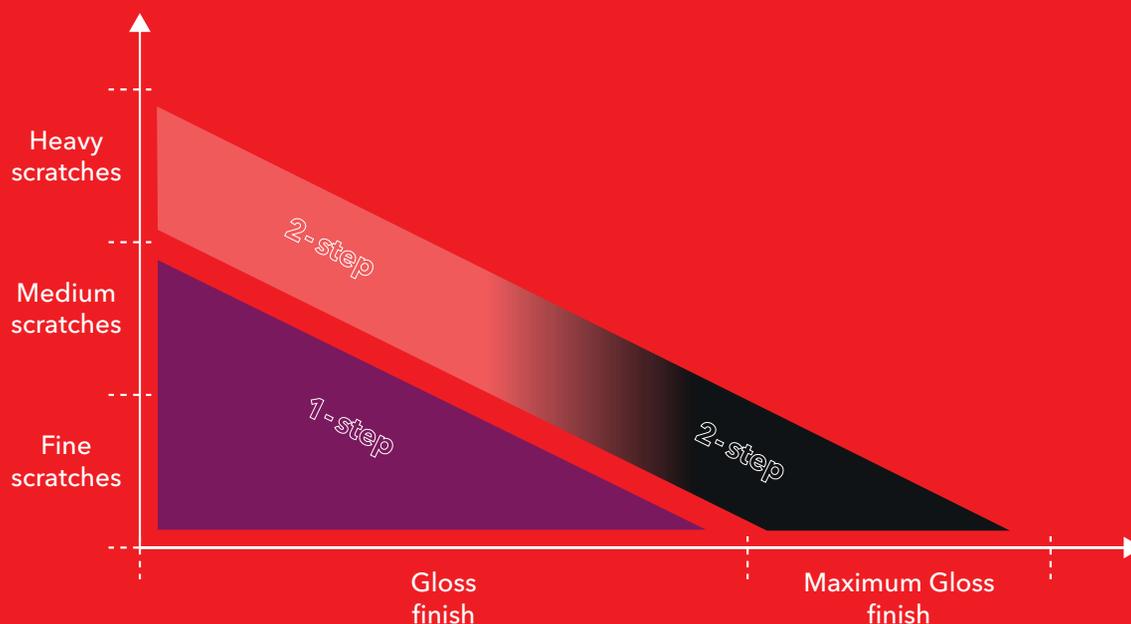

Cut pad, hard PP-C

High-quality, hard sponge for maximum removal rate. The special reticulation makes the red foam very tear-resistant and durable. Ideally suited for deep scratches and heavily-weathered paintwork when combined with the red polish.



2-step



Designation Order No.

| | |
|--------------|--------|
| PP-C 150 VE2 | 532397 |
| PP-C 150 VE5 | 532648 |
| PP-C 125 VE2 | 532398 |
| PP-C 125 VE5 | 532649 |
| PP-C 75 VE2 | 532399 |
| PP-C 75 VE5 | 532650 |
| PP-C 50 VE5 | 532400 |
| PP-C 25 VE5 | 532401 |

Finish pad, soft PP-F

High-quality and soft finishing sponge for a maximum deep sheen. The special reticulation makes the black foam very tear-resistant and durable. When combined with the black polish it's ideal for removing slight scratches, holograms and for general colour refreshing.



2-step



Designation Order No.

| | |
|--------------|--------|
| PP-F 150 VE2 | 532407 |
| PP-F 150 VE5 | 532655 |
| PP-F 125 VE2 | 532408 |
| PP-F 125 VE5 | 532656 |
| PP-F 75 VE2 | 532409 |
| PP-F 75 VE5 | 532657 |
| PP-F 50 VE5 | 532410 |
| PP-F 25 VE5 | 532411 |

Universal pad, medium PP-M

High-quality universal sponge. The special reticulation makes the violet foam very tear-resistant and durable. Ideally suited for moderately-scratched paintwork, traces of use and for refreshing the colour of used paintwork with subsequent sealing in just one step when combined with the violet polish.



1-step



Designation Order No.

| | |
|--------------|--------|
| PP-M 150 VE2 | 532402 |
| PP-M 150 VE5 | 532652 |
| PP-M 125 VE2 | 532403 |
| PP-M 125 VE5 | 532653 |
| PP-M 75 VE 2 | 532404 |
| PP-M 75 VE 5 | 532654 |
| PP-M 50 VE5 | 532405 |
| PP-M 25 VE5 | 532406 |



Cutting polish

For deep scratches

2-step

Special polish for removing deep scratches and heavy traces of wear, as well as for reconditioning heavily-wetted paintwork and sanding up to grit size P 1500.

- For all paint types
- Free from silicones, waxes and solvents
- For rotary and eccentric work
- Abrasiveness 5
- Gloss level 2

| Designation | Order No |
|-------------|----------|
| PC-C 250 | 532413 |
| PC-C 1000 | 532412 |



Finishing polish

For maximum gloss

2-step

Special polish for removing slight scratches and holograms as well as for general paint and colour refreshing. For all paint types

- Free from silicones, waxes and solvents
- For eccentric and rotary work
- Abrasiveness 2
- Gloss level 5

| Designation | Order No |
|-------------|----------|
| PC-F 250 | 532417 |
| PC-F 1000 | 532416 |



Universal polish, 1-step

Liquid preservation

1-step

Ideally suited for moderate scratches, traces of use and for refreshing the colour of used paintwork with subsequent sealing in just one step. For all paint types

- For eccentric and rotary work
- Abrasiveness 3
- Gloss level 4

| Designation | Order No |
|-------------|----------|
| PC-M 250 | 532415 |
| PC-M 1000 | 532414 |

Microfibre polishing pad MC-PT 160

The microfiber pad is equipped with the tried-and-tested PerfectTouch sandwich structure. This ensures good pressure distribution without defusing the eccentric movement. Specially designed for eccentric polishers, especially those with a free-running plate.



| Designation | Order No. |
|-------------|-----------|
| MC-PT 160 | 434434 |

Polishing lambswool TW-PT

Polishing lambswool consisting of 90% natural wool and 10% polyester. This combination provides for longer service life and greater volume. The special PerfectTouch sandwich design and extra orange foam layer gives the pad that slight degree of cushioning and much greater stiffness.



| Designation | Order No. |
|-------------|-----------|
| TW-PT 80 | 420484 |
| TW-PT 140 | 376515 |
| TW-PT 160 | 376523 |

Polishing sponge PUK-R 130

The red sponge for hand application is ergonomically shaped and has a very soft foam with a fine texture. It is ideally suited to working with sealants and care agents on painted and plastic surfaces, for hard-to-reach places or sensitive surfaces that are difficult to deal with by using a machine.



| Designation | Order No. |
|-------------|-----------|
| PUK-R 130 | 442682 |

Microfibre cloth, universal

High-quality and highly absorbent microfibre cloth with one short-pile and one medium-pile side. Very gentle on paintwork thanks to its rimless cut shape.



PT-MF 380 Dual (VE5)


| Size | Order no. |
|------------|-----------|
| 380x380 mm | 532418 |

The right choice


FLEX gives you an overview. So that application, tool and accessories produce the perfect result.



Claims

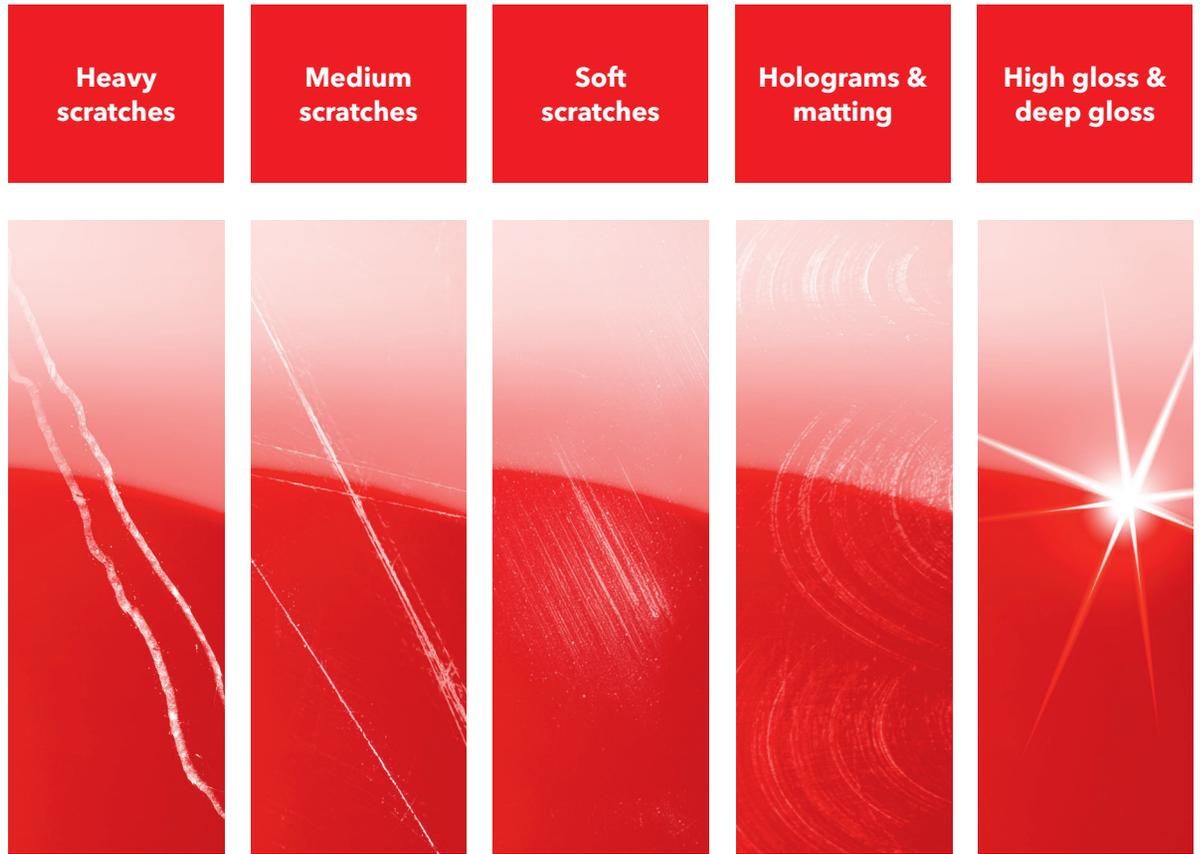

Application areas of drive types

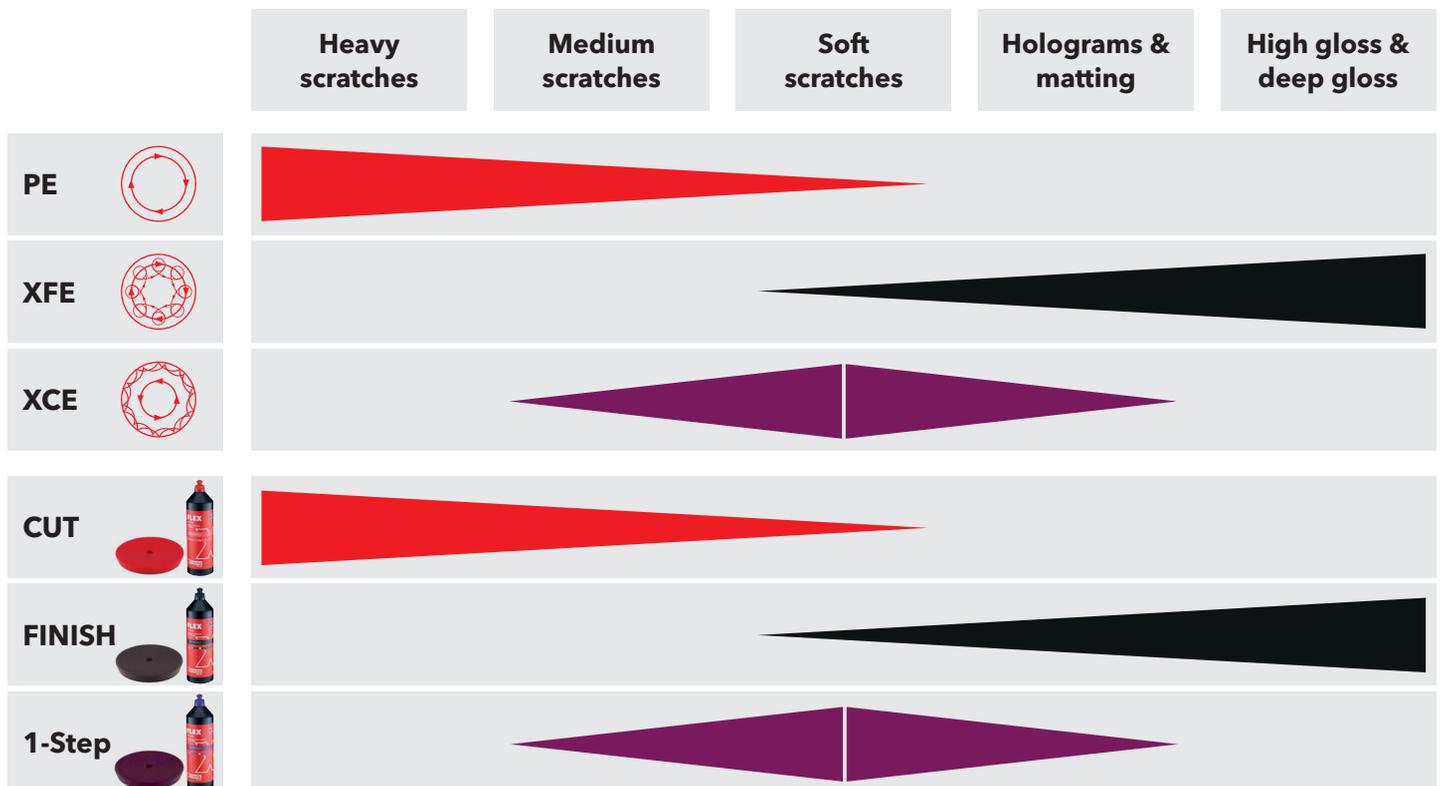

Automotive products

Everything for the workshop



WHP-1 AC/DC

Wall holder for polisher, small

Small wall holder for 2 polishers made of high quality powder-coated steel. Due to the innovative shape, the machines can be stored in a space-saving way and safely due to the edge protection, as protection against scratches. Better structure, organization and equipment of the working environment. Thus, a professional impression is created for users and customers.



Order no.
530883

WHP-2 AC/DC

Wall holder for polisher, big

In addition, the large holder offers storage options for polishes, adapters, etc. as well as a battery holder, mounting option for the charger and a cable holder.



Order no.
530882

WHP Battery Hook

Battery hook for small and large wall mount

Practical hook for 10.8 and 18 volt batteries made of high quality powder coated steel.



Order no.
530720

WHP Cable Hook

Cable hook for small and large wall mount

Practical hook for hanging cables made of high quality powder coated steel.



Order no.
530721

SF 150-P Swirl Finder

Ideal LED light to control surface conditions.

Due to the colour temperature and reproduction, surface damage such as holograms, scratches etc. can be made more visible. Light intensity 140 lumens and adjustable focus with a beam angle of 10° -70°, lighting time approx. 2 hours incl. batteries.



Order No.
463302

DB 41

Bitset 41 pieces

Practical and high-quality 41-piece bit set in an impact-resistant, lockable box, stackable on top of each other thanks to the locking mechanism on the side.



Order no.
530494

EXS M14 Set

Extension set for rotary polisher

Rotary polisher extensions for working on narrow and difficult to reach places such as wing mirrors, spoilers, bumpers, etc.



Order no.
458813

HG 530 18

Cordless hot air gun 18.0 V

Technical features

- + Powerful hot air blower with 2 temperature settings 260°/530°C and 2 air flow settings
- + Hardening and drying as well as removal of paints and coatings, stickers, moulding and shrinking of plastic parts and shrink tubes, soldering of electrical connections and copper pipe connections



Order No.
531493

HG 650 2000

Hot air gun

Technical features

- + Fast heating up to 300°C in ~15 seconds
- + Hardening and drying as well as removal of paints and coatings, stickers, moulding and shrinking of plastic parts and shrink tubes, soldering of electrical connections and copper pipe connections



Order No.
532579

GG 200 18

Cordless hot glue gun 18.0 V

Technical features

- + Powerful hot glue gun with 2 temperature settings of 130°/200°C.
- + The reliable gluing performance of 20 g/min enables rapid work progress
- + Quick heating-up thanks to electronically-controlled heating elements within 2 minutes



Order No.
531737

SD 5-300 4.0

Battery screwdriver
in pocket format 4.0 V

Technical features

- + Extremely slim handle area with soft-grip inserts for perfect Handling
- + Three different torque levels ensure flexibility in use
- + 1/4" hex tool holder



Tool-Free



Order No.
530728

CI 11 18.0

Cordless compressor 18.0 V

Technical features

- + Pressure presetting with automatic switch-off when the desired pressure is reached
- + Perfect flexibility thanks to 18 V battery power and 12 V on-board voltage via cigarette adapter. For filling car and bicycle tyres



18V
Battery voltage



LI-ION
Lithium-ion
technology



Order No.
506648

BW 18.0-EC/Detailing Set

Battery blower 18.0 V

Technical features

- + 18 V battery power, ideal for vehicle drying
- + Thanks to compact design ideal for hard-to-reach places



18V
Battery voltage



BRUSHLESS
EC-Motor Technology



Throttle switch



Battery pack
not included in
delivery

Order No.
530537

OSE 2-70x198-EC

Compact orbital sander with speed control

Technical features

- + Sanding speed suitable for the material thanks to electronic speed adjustment
- + Ideal for sanding filled surfaces on car parts during repair work



Order no.

530632

ORE 3-150 EC / ORE 5-150 EC

Powerful random orbital sander with speed control, 150 mm

Technical features

- + Grinding speed suitable for the material due to adjustable speed
- + Impact-resistant filter cartridge with replaceable PES filter allows easy dust disposal or cleaning of the filter with maximum service life
- + Machines are also available in L-BOXX®



ORE 3-150 EC

Order no.

447684

ORE 5-150 EC

Order no.


447706

RD 12/18/230

Digital battery construction site radio 12.0 / 18.0 V

Technical features

- + Battery construction site radio with mega sound and LED light strip
- + With integrated Bluetooth® technology, AUX input, USB port and charging option for smartphones, tablets

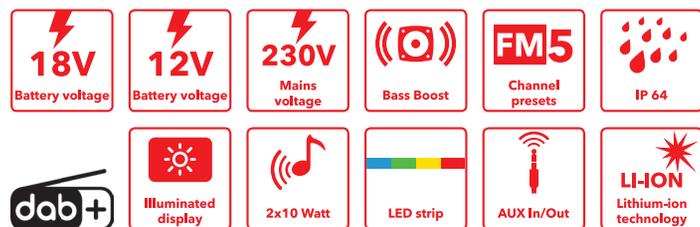

Order no.

532276

DWL 2500 12/18

Powerful LED full-spectrum light with max. 3000 lumen and extremely long runtime of up to 30 hours (300 lm).

Technical features

- + The all-daylight function allows the colour temperature to be set in 5 stages between 2500 K - 6500 K. This enables an accurate adjustment to the job in hand
- + Ideal for checking the paint surface, determining colour and detecting paintwork mistakes, holograms, scratches
- + Integrated powerbank, USB port and charging option for smartphones, tablets
- + Robust and durable for the most exacting demands
- + Connecting thread for tripods
- + LED battery capacity indicator



DWL 2500 12/18

Order No.
532325



WLS-70-190

Mobile tripod

Order no.
511064

TL 4000 18.0/230

LED cordless building site spotlight with tripod 18.0 V

NEW

Technical features

- + Powerful cordless construction site light with 3 brightness settings, 1000, 2000 and 4000 lumen
- + Removable multifunctional head
- + The lamp's three panels with two axes of rotation allow free positioning of the light angle



Order No.
530375

WL 300 18.0

LED cordless hand torch 18.0 V

NEW

Technical features

- + Powerful LED cordless light with 2 brightness levels, 300 lumen and 150 lumen
- + LED lamp head can be swivelled through 104° degrees
- + Metal bracket and belt clip



Order No.
513075

WL 1000 18.0

LED cordless hand torch 18.0 V

NEW

Technical features

- + LED lamp head can be swivelled through 180° + 270° degrees
- + Powerful LED cordless lamp with 8 LEDs and 3 brightness levels



Order No.
530610

RS 25 18.0-EC

Powerful cordless reciprocating saw with a long stroke, 18.0 V

Technical features

- + Saw blade can be turned through 180°
- + Twin-bearing lifting rod guide with vibration balancing for fatigue-free working
- + Allows swivel-action saw support to optimally adapt to the workpiece

Also available as set in L-BOXX® (Order no. 530374).

Order No.

530372



BRUSHLESS



LB 125 18.0-EC

Cordless angle grinder with brake 18.0 V, 125 mm

Technical features

- + Brushless motor
- + With electronic brake, stops the tool in approx. 3 seconds
- + Perfect dust protection thanks to removable protective metal grille
- + Extremely streamlined handle section with soft-grip inlays

Also available as set in L-BOXX® (Order no. 499315) or as complete set with battery and charger in L-BOXX® (Order no. 499331).

Order No.

499307



DGE 25 18.0-EC

Cordless straight sander 18.0 V with variable, high speed range

Technical features

- + Long-necked design for optimum handling and reaching into hard-to-access areas
- + The ideal tool for grinding, deburring, freehand milling, cutting, rust removal

Also available as set in L-BOXX® (Order no. 518972).

Order No.

518867



VCE 33 L MC

Safety vacuum cleaner with manual filter cleaning system, 30 l, class L

Technical features

- + The high-performance turbine ensures both a high suction capacity and a high vacuum. The outcome is an excellent extraction result
- + With permanent socket and electronic automatic on/off switch
- + Filter vibration at the press of a button
- + The flat-fold filter with Teflon coating / nanocoating allows optimum use of the tank volume
- + Simple filter change without removing the suction head
- + Suitable for all dust with OEL value $\geq 0.1 \text{ mg/m}^3$



Order no.

444103

VCE 33 M AC

Safety vacuum cleaner with automatic filter cleaning system, 30 l, class M

Technical features

- + The high-performance turbine ensures both a high suction capacity and a high vacuum
- + With permanent socket and electronic automatic on/off switch
- + The flow rate control via the rotary switch
- + Dust-protected antistatic finish
- + Simple filter change without removing the suction head
- + Automatic filter cleaning system
- + Suitable for all dusts with OEL values $\geq 0.1 \text{ mg/m}^3$



Order no.

444138

VCE 44 M AC

Safety vacuum cleaner with automatic filter cleaning system, 42 l, class M

Technical features

- + Same equipment as VCE 33 M AC



Order no.

444170

Safety vacuum cleaner accessories



SAD 27 AS

Antistatic sleeve $\varnothing 27 \text{ mm}$, with female thread, suitable for suction hose 379395.

Order no.

382736



SH 27x3,5m AS

Inner $\varnothing 27 \text{ mm}$, 3.5 m with flexible rubber sleeve, antistatic.

Order no.

445045



SAM-C 32 AS/NL

Threaded ring $\varnothing 32 \text{ mm}$ with clip connection incl. secondary air control for reducing the suction vacuum.

Order no.

406716



VCE-AP Air

Attachment for the use of pneumatic devices and for the fixation of L-BOXXes and Tanos staystainers.

Order no.

445177

VC 2 L MC Hip 18.0-EC

Compact battery hip vacuum cleaner with manual filter cleaning, 1.5 l class L

Technical features

- + Compact, handy and lightweight suction cup with waist belt and carrying harness for mobile use
- + The high-performance turbine ensures high suction power and high vacuum. This produces an excellent suction result



Battery pack not included in delivery

Order no.
509981

VC 6 L MC

Compact vacuum cleaner with manual filter cleaning, 6 l, class L

Technical features

- + Small, compact, mega power - the small vacuum cleaner with cable
- + Very compact, handy and light vacuum cleaner with carrying strap for portable use. The compact design means it fits in all vehicles



Order no.
481513

VC 6 L MC 18.0

Compact vacuum cleaner with manual filter cleaning, 6 l, class L

Technical features

- + Small, compact, mobile - with powerful 18 V battery power
- + Perfect for professional cleaning of vehicles, workshops, warehouses, final assembly, offices, etc.



Battery pack not included in delivery

Order no.
481491

VC 21 L MC

Safety vacuum cleaner with manual filter cleaning system, 20 l, class L

Technical features

- + Handy and compact vacuum cleaner, easy to use and easy to transport
- + High suction capacity and high vacuum
- + Excellent extraction result



Order no.
405418

VCE 22 M MC V

Safety vacuum cleaner with manual filter cleaning system, 20 l, class M

Technical features

- + Especially suitable for the automotive sector
- + Selector switch suction \varnothing 32 or 21 mm
- + Dust protected antistatic equipment



Antistatic-Suction-hose \varnothing 27 mm
3,5 m included in delivery

Order no.
530920

VCE 26 L MC

Safety vacuum cleaner with manual filter cleaning system, 25 l, class L

Technical features

- + Suction force regulation, suction force adapted to the tool through stepless regulation
- + Suitable for increased stress according to EN 60335-2-69 for professional applications



Order no.
405426

DD 2G 12-EC

2-speed cordless drill 12.0 V

Technical features

- ⊕ The strong all-rounder
- ⊕ With quick-change system, this enables simple, tool-free exchange of angle attachment, drill chuck and bit holder



Also available as set in L-BOXX® (Order no. 532272)

Order no.
533846

DD 2G 18.0-EC LD

Compact 2-speed cordless drill screwdriver 18.0 V

Technical features

- ⊕ The mega compact
- ⊕ Quick-action drill chuck in metal design with thrust ring and auto lock function



Also available as complete set in transport case incl. battery and charger (Order no. 519049)

Order no.
530531

IW 3/4" 18.0-EC

Battery impact wrench 18.0 V

Technical features

- ⊕ Square socket for 3/4" hammer nuts
- ⊕ Powerful percussion unit for highest performance



Also available as set in L-BOXX® (Order no. 492620) or as complete set incl. battery and charger in L-BOXX® (Order no. 492647)

Order no.
492612

Brush set for DD 2G



Order no.
530875

IW 1/2" 750 18.0-EC

Battery impact wrench 18.0 V

Technical features

- ⊕ Square socket for 1/2" impact nuts
- ⊕ Powerful percussion unit for highest performance
- ⊕ Up to 750 Nm



Also available as set in L-BOXX® (Order no. 530232) and as complete set incl. battery and charger in L-BOXX® (Order no. 530233)

Order no.
530231

IW 1/2" 950 18.0-EC

Battery impact wrench 18.0 V

Technical features

- ⊕ Square socket for 1/2" impact nuts
- ⊕ Powerful percussion unit for highest performance
- ⊕ Up to 950 Nm



Also available as set in L-BOXX® (Order no. 530188) and as complete set incl. battery and charger in L-BOXX® (Order no. 530187)

Order no.
530189

IW 1/2" 18.0-EC

Battery impact wrench 18.0 V

Technical features

- ⊕ Speed command: Possibility of setting three different speed ranges for different applications
- ⊕ Integrated LED light with afterglow function



Also available as set in L-BOXX® (Order no. 438308) or as complete set with battery and charger in L-BOXX® (Order no. 504912)

Order no.
491268

IW 1/2" 400 18.0-EC

Compact cordless impact screwdriver 18 V

Technical features

- + The short head length makes it ideal for screwdriving in confined areas
- + Tool holder square drive for 1/2" impact sockets

Also available as set in L-BOXX® (Order no. 531503) or as complete set with battery and charger in L-BOXX® (Order no. 531504)

Order no.

531502



BRUSHLESS



IW 1/2" 1500 18-EC

Cordless impact wrench 18 V

Technical features

- + Compact design with die-cast aluminium machine head. Extremely durable and impact-resistant
- + Three different speed settings for a variety of applications
- + Tool holder square drive for 1/2" impact sockets

Also available as set in L-BOXX® (Order no. 532064) or as complete set with battery and charger in L-BOXX® (Order no. 532065)

Order no.

532063



BRUSHLESS



IW 3/4" 1600 18-EC

Durable cordless impact screwdriver 18 V

Technical features

- + Compact design with die-cast aluminium machine head. Extremely durable and impact-resistant
- + Three different speed settings for a variety of applications
- + Tool holder square drive for 3/4" impact sockets

Also available as set in L-BOXX® (Order no. 532073) or as complete set with battery and charger in L-BOXX® (Order no. 532074)

Order no.

532072



BRUSHLESS





MT 18.0-EC

18 V battery-powered multitool
with StarlockMAX holder



Technical features

- + Large oscillation angle of 2° on both sides, thus supporting fast sawing, cutting, sanding and scraping-off
- + StarlockMAX tool holder and compatible clamping mechanism for all Starlock accessory parts
- + can be used for a wide range of applications
- + Simple and precise presetting of the cutting depth
- + Anti-vibration damping elements
- + Tool-free tool change
- + Integrated double LED lamp with after-glow function
- + Electronic management system
- + LED battery capacity display

STARLOCK MAX



STARLOCK PLUS



MT 18.0-EC C

Standard equipment

- in box

Designation Order no.

MT 18.0-EC C 518409

MT 18.0-EC

Standard equipment

- 1 carrying case L-BOXX® 136

Designation Order no.

MT 18.0-EC 518395

MT 18.0-EC/5.0 Set


Standard equipment

- 2 battery pack Li-Ion 18,0 V
- 1 quick charger
- 1 carrying case L-BOXX® 136

Designation Order no.

MT 18.0-EC/
5.0 Set 518417

Multitool sets for wood and metal

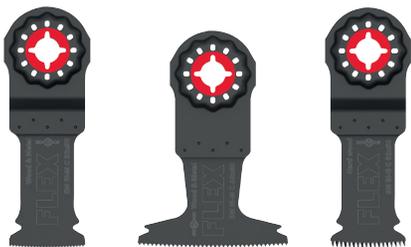

SM Bi-Set VE3

- + With Starlock attachment for optimum power transmission and convenient blade change
- + Outstanding service life in hard and tough metals
- + The hardwood saw blade is suitable for wood and metal work perfectly suitable

Order no.

531055



SM/RM Set VE3

- + With Starlock attachment for optimum power transmission and convenient blade change
- + Increased wear resistance
- + With the delta blade every corner is optimally accessible
- + The metal saw blade is excellently suited for sawing off e.g. copper pipes

Order no.

531056

Long performance guaranteed

This is Performance. This is FLEX.

3

YEARS

FLEX WARRANTY

3-year warranty

Simply register and use the 3-year warranty immediately at warranty.flex-tools.com



Our products are thoroughly tested to ensure FLEX premium quality. That's why with the 3-year guarantee, we offer you a free, all-round carefree package - on all power tools*, Li-ion batteries, the associated chargers and laser measuring devices.

To benefit from the warranty, simply register your device within 30 days of purchase:

- 🔧 Warranty period extended to three years
- 🔧 Service certificate in case a repair is required
- 🔧 Tracking of repair status if the machine is under warranty

*Does not apply to H Class vacuum cleaners.



Would you like to have your warranty certificates always on your smartphone and manage them while on the go? No problem - use the 3-year warranty service easily while on the move with the FLEX Warranty app.

Simply download the free app to use the service:



For more information about our automotive range, please contact your competent specialist dealer



EN / 01-2025

or



FLEX-Elektrowerkzeuge GmbH

Bahnhofstrasse 15 71711 Steinheim Germany

www.flex-tools.com

The configuration of the machines is the same as the usual basic equipment. Subject to VAT changes, technical changes, price changes and errors. All prices in bold are recommended prices plus VAT.

FLEX